

FT-123 Auberge Fountain

Two people are recommended for the installation of this fountain!

PRODUCT INFORMATION



FOUNTAIN INFORMATION:

This fountain holds approximately 11 gallons of water.

**This fountain uses a medium fountain cover.
(FTNCOV-LG)**

**Compatible with #10 Refill Device and LED Kits
(A special stopper is required to use the refill kit for
this fountain.)**

Pump Kit Parts List

PK140 pump (1)
LED-LIGHT (1) ***
LED-CORD (1) ***
LED-TRANS (1) ***
#10 stopper (1)
2.8 oz tube of silicone (1)
Approx. 12" length of 1/2" Black non-kink tubing **
Approx. 3" length of 5/8" clear vinyl tube (1) **
Hose clamps (1) *

* Hose clamps may be used as flow restrictors
**Black non-kink tubing and clear vinyl tubing have been preassembled
***Do not preassemble the LED Light and Transformer

TOOLS REQUIRED:

Bubble Level



Flat Head Screwdriver



PUMP INFORMATION:

**OEMPF140 - 140 GPH Pump
6 FT cord length**

- WINTER CARE -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise, components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drainpipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to ensure that plastic is secure, and water is not accumulating in any fountain component.

- GENERAL FOUNTAIN TIPS -

Install fountains on a level surface. You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.

Check out YouTube for a "How to" video.

For more Campania product information visit www.campaniainternational.com

All of our cast stone is proudly




Made in USA

FT-123 Auberge Fountain


Two people are recommended for the installation of this fountain!

ASSEMBLY INSTRUCTIONS

Assemble your fountain on a level surface capable of holding a minimum of 555 pounds with an approximate 2.25 square foot footprint.

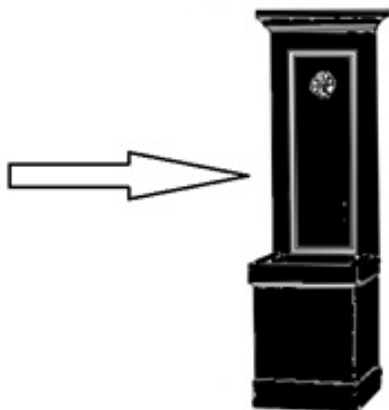

FT-123A (451 lbs)
18"L x 21.75"W x 64"H

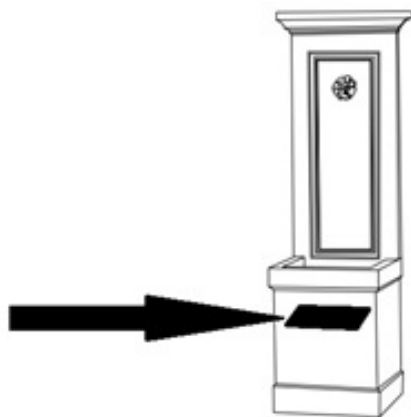

FT-123B (10 lbs)
12"L x 11.75"W x 1"H

1. Position the basin (FT-123A) where the fountain is to be installed, ensuring that it will be level.
2. Assemble the pump kit and stopper
 - a. **NOTE: Be sure to use the appropriate size adapter provided with the pump and do not plug the pump into the transformer until assembly is complete.**
 - b. Using a hose clamp, attach the end of the 1/2" non-kink tubing without the clear tubing to the pump outlet.
 - c. Spread a small amount of silicone **THINLY** around the LED light cord approx. 24" from the light.
 - d. Do the same around the pump cord about 12" from the pump.
 - e. Press the two cords together.
 - f. Place the #10 stopper around both cords.
3. Feed both cords through the large hole in the fountain basin (FT-123A) and through the channel, which is located in the back-right corner of the base.
4. **FIRMLY** and evenly press the stopper into the hole evenly.
 - a. Note: Using the handle of a screwdriver or hammer works best to press the stopper in place.
5. Spread a thin bead of silicone around the perimeter of the stopper.
6. Connect the 5/8" clear vinyl tubing to the CPVC pipe protruding in the bottom-back wall of the basin (FT-123A).
7. Carefully lower the fountain disc (FT-123B) into the basin.
 - a. Hold the light up while inserting the disc and center it once it is in place.
 - i. Be sure not to pull the stopper back out.
8. Connect the LED Light to the LED-Cord then the LED Transformer.
9. Let the fountain sit 24 hours before filling it with water.