

FT-289 La Mirande Fountain

Three people are recommended for the installation of this fountain!



FOUNTAIN INFORMATION:

This fountain holds approximately 20 gallons of water.

**This fountain uses a medium fountain cover.
(FTNCOV-MED)**

**Compatible with #10 Refill Device and LED kits
(A special stopper is required to use the refill kit for
this fountain.)**

Pump Kit Parts List

PK800 pump (1)
PK500 pump (1)
#10 Double-hole stopper (1)
#7 Drain Stopper (1)
2" length of 3/4" clear vinyl tubing (1) **
2" length of 5/8" clear vinyl tubing (4) **
12" length of 1/2" black non-kink tubing (2) **
16" length of 1/2" black non-kink tubing (1) **
2" length of 1/2" CPVC Pipe (2) **
Wedges (6)
Hose clamps (2) *

* Hose clamps may be used as flow restrictors
** Tubing has been preassembled

TOOLS REQUIRED:

Bubble Level



PUMP INFORMATION:

**PP800 - 800 GPH Pump ~ PF525 - 525 GPH Pump
16 FT cord length for both pumps**

- W I N T E R C A R E -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise, components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drainpipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to ensure that plastic is secure and water is not accumulating in any fountain component.

- G E N E R A L F O U N T A I N T I P S -

Install fountains on a level surface. You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.

All of our cast stone is proudly



Made in USA


Check out YouTube for a "How to" video.

For more Campania product information visit www.campaniainternational.com


FT-289 La Mirande Fountain

Three people are recommended for the installation of this fountain!

Assemble your fountain on a level surface capable of holding a minimum of 1030 pounds with an approximate 7.75 square foot footprint.




FT-281D (572 lbs)
46.5"L x 46.5"W x 11"H

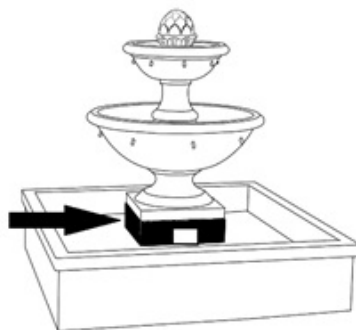

FT-289F (33 lbs)
14"L x 14"W x 9.75"H



FT-289E (145 lbs)
28"W x 17"H




FT-273C (30 lbs)
13.75"W x 9"H

1. Place the basin (FT-281D) into position where the fountain will be installed, ensuring that it is level.
 - a. **Note: Check that all components are leveled as the fountain is assembled.**
2. Assemble the fountain plumbing
 - a. Attach the 12" length of non-kink with the 3/4" clear tubing to the PK800 pump outlet.
 - b. Use a hose clamp to attach the other 12" length of non-kink tubing to the PK500 pump outlet with the smallest adapter inserted.
 - c. Place the stopper around the pump cords approximately 8" from the pump.
3. Feed the pump cords all the way through the hole and channel in the basin (FT-281D).
4. **FIRMLY** press the stopper into the hole evenly.
 - a. **Note:** Using the handle of a screwdriver or hammer works best to press the stopper in place.
5. Position the pump house (FT-289F) over the pumps in the basin (FT-281D).
6. Feed the non-kink tubing connected to the pumps through the top of the pump house (FT-289F).
7. Position the large bowl (FT-289E) over the pump house (FT-289F).
8. Insert the CPVC pipes that are already attached to both 12" tubing assemblies into the CPVC couplings in the bottom of the large bowl (FT-289E).
 - a. PK800 should be connected to the **center** pipe.
9. Connect the clear end of the 16" length of tubing to the **center** pipe protruding from **inside** the large bowl (FT-289E).
10. Position the small pedestal (FT-273C) over the center of the large bowl (FT-289E).
11. Feed the tubing through the hole and to the top of the small pedestal (FT-273C).


FT-289 La Mirande Fountain

Three people are recommended for the installation of this fountain!

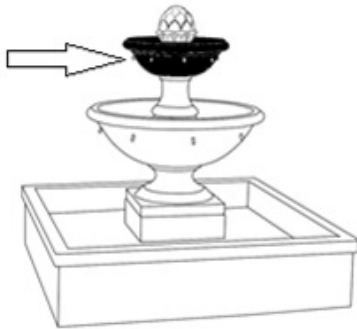


FT-289B (25 lbs)
17"W x 6.25"H

12. Position the small bowl (FT-289B) over the small pedestal (FT-273C).
13. Secure the loose end of the non-kink tubing to the pipe protruding from the bottom of the small bowl (FT-289B) with a hose clamp.
14. Center the small bowl (FT-289B) over the small pedestal (FT-273C).



FT-289A (15 lbs)
12.75"W x 7"H

15. Fit the finial (FT-289A) into the small bowl (FT-289B) by feeding the protruding copper pipe from the bowl into the hole in the bottom of the finial.

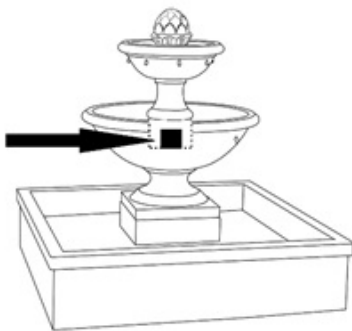

FT-273D (5 lbs)
6" L x 2"W x 4.75"H

16. Place the small pedestal door (FT-273D) into the small pedestal (FT-273C).



FT-289G (5 lbs)
7"L x 2"W x 6"H

17. Place the pump house door (FT-289G) into the pump house (FT-289F).

18. Fill the fountain with water.