

# FT-29 Palazzo Obelisk Fountain

**Three people are recommended for the installation of this fountain!**



## FOUNTAIN INFORMATION:

**This fountain holds approximately 30 gallon of water.**

**This fountain uses an extra-large fountain cover.  
(FTNCOV-XLG)**

**Compatible with #10 Refill Device and LED Kits  
(A special stopper is required to use the refill kit for  
this fountain.)**

## Pump Kit Parts List

PK800 Pump (1)  
#10 stopper (1)  
Large T connector  $\frac{1}{2}$ "x $\frac{3}{4}$ "x  $\frac{1}{2}$ ": (1) \*\*  
Approx. 6" length of  $\frac{3}{4}$ " clear tubing (1) \*\*  
Approx. 6" length of  $\frac{1}{2}$ " non-kink tubing (2) \*\*  
Approx. 18" length of  $\frac{1}{2}$ "black non-kink tubing (1)  
Hose clamps (4)\*  
Wedges (4)

\* Hose clamps may be used as flow restrictors

\*\*The internal tubing has been preassembled into 2 parts

## TOOLS REQUIRED:

Bubble Level



## PUMP INFORMATION:

**OEMPP800 - 800 GPH Pump  
16 FT cord length**

## - W I N T E R   C A R E -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drainpipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to insure that plastic is secure and water is not accumulating in any fountain component.

## - G E N E R A L   F O U N T A I N   T I P S -

**Install fountains on a level surface.** You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.

**All of our cast stone is proudly**



**Made in USA**


Check out YouTube for a "How to" video.

For more Campania product information visit [www.campaniainternational.com](http://www.campaniainternational.com)

# FT-29 Palazzo Obelisk Fountain

## Three people are recommended for the installation of this fountain!


Assemble your fountain on a level surface capable of holding a minimum of 1135 pounds with an approximate 14 square foot footprint.




FT-29C/30D (579 lbs)  
45"L x 45"W x 11"H

1. Place the basin (FT-29C/30D) into position where the fountain will be installed, ensuring that it is level.

2. Assemble the pump kit
  - a. Connect the 3/4" clear tubing of the preassembled tubing to the pump by sliding it over the pump adapter
  - b. Place the stopper around the pump cord approximately 8 inches from the pump.

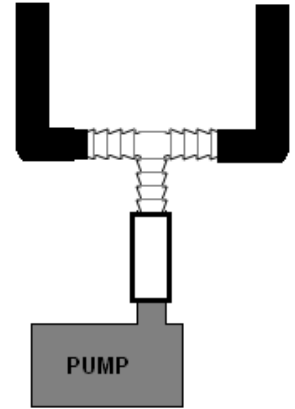

3. Feed the pump cord through the hole in the basin (FT-29C/30D) and the channel.
4. **FIRMLY** press the stopper into the hole evenly.
  - a. Note: Using the handle of a screwdriver or hammer works best to press the stopper in place.




FT-29B/30C (52 lbs)  
12"L x 12"W x 8"H

5. Place the pump cover (FT-29B/30C) over the pump. Ensure it is placed properly and leveled.

### **BOTTOM OF COLUMN (FT-29B)**


6. Secure the 2 open ended 6" pieces of non-kink tubing to the 2 pipes protruding from the bottom of the column (FT-30B).
7. Center the column (FT-29B) on top of the pump cover (FT-29B/30C).



FT-29B (65 lbs)  
12"L x 12"W x 12"H


### **INSIDE OF COLUMN (FT-29B)**

8. Use a hose clamp to attach the 18" length of non-kink tubing to one of the two pipes protruding on the inside of the column (FT-30B).



FT-29A (175 lbs)  
11"L x 11"W x 38"H

9. Use another hose clamp to secure the 18" non-kink tubing to the pipe protruding from the bottom of the obelisk (FT-29A).
10. Center the obelisk (FT-29A) over the column (FT-29B).



FT-29B/30CC (4 lbs)  
5"L x 1"W x 5"H

11. Place the pump cover door (FT-29B/30CC) in the pump access opening of the pump cover (FT-29C/30D).

12. Fill the basin with water.