

FT-321 Waves Fountain

Two people are recommended for the installation of this fountain!



Pump Kit Parts List

PK800 pump (1)
#10 stopper (1)
#7 Drain stopper (1)
CPVC Water flow assembly (1)
 7.5" length of 1/2" cpvc (2)
 4 3/4" length of 1/2" cpvc (2)
 1 1/2" length of 1/2" cpvc (4)
 1" length of 1/2" cpvc (3)
 1/2" CPVC T-Connectors (4)
 1/2" CPVC 90° Elbows (4)
15" length of 1/2" Black Non-Kink tubing (1) **
2" length of 5/8" clear vinyl tubing (2) **
2" length of 3/4" clear vinyl tubing (1) **
2" length of 1/2" PVC pipe (1) **
Wedges (2)

** Tubing has been preassembled

FOUNTAIN INFORMATION:

This fountain holds approximately 15 gallons of water.

This fountain uses a medium fountain cover.
(FTNCOV-MED)

Compatible with Refill #10 Device
(A different style stopper may be requested for this part.)

TOOLS REQUIRED:

Bubble Level



PUMP INFORMATION:

OEMPP800 - 800 GPH Pump
16 FT cord length

- WINTER CARE -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise, components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drainpipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to insure that plastic is secure and water is not accumulating in any fountain component.

- GENERAL FOUNTAIN TIPS -

Install fountains on a level surface. You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.

Check out YouTube for a "How to" video.

For more Campania product information visit www.campaniainternational.com

All of our cast stone is proudly




Made in USA


FT-321 Waves Fountain

Two people are recommended for the installation of this fountain!

Assemble your fountain on a level surface capable of holding a minimum of 250 pounds with an approximate 3 square foot footprint.

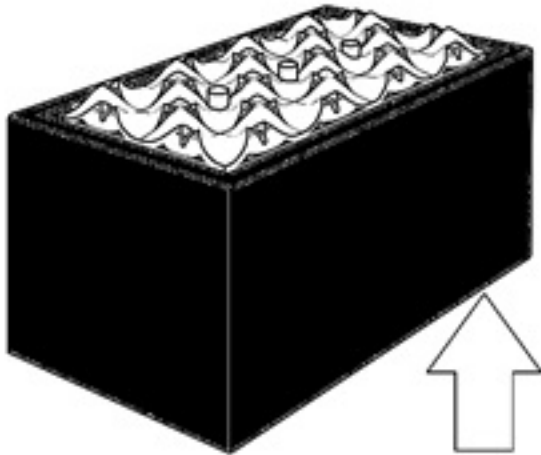


FT-321B (186 lbs)
28.25"L x 16.25"W x 13"H

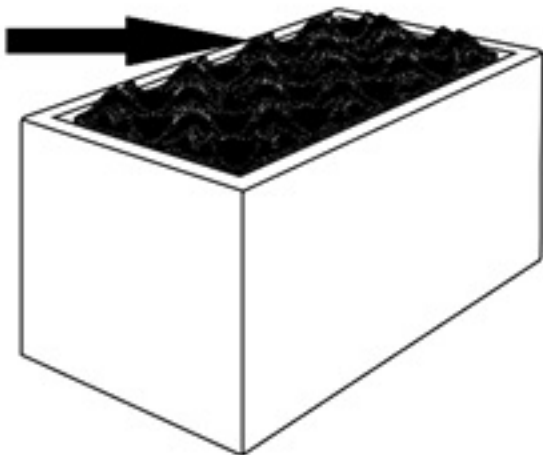

FT-321A (33 lbs)
24"L x 12"W x 2.25"H

1. Position the basin (FT-321B) where the fountain is to be installed, ensuring that it is level.
2. Assemble the pump kit.
 - a. Attach the pump adapter provided to the pump.
 - b. Fit the 3/4" end of the tubing assembly to the pump.
 - c. Place the stopper around the pump cord about 6" from the pump.
3. Feed the pump cord all the way through the hole and the channel in the basin (FT-321B) to ensure the fountain will be level.
4. **FIRMLY** press the stopper into the hole evenly.
 - a. **Note:** Using the handle of a screwdriver or hammer works best.
5. On the underside of the water feature (FT-321A), connect the CPVC Water flow assembly into the 3 protruding couplings.
6. Holding the water feature (FT-321A) over the basin (FT-321B), insert the CPVC end of the tubing assembly into the Water flow assembly.

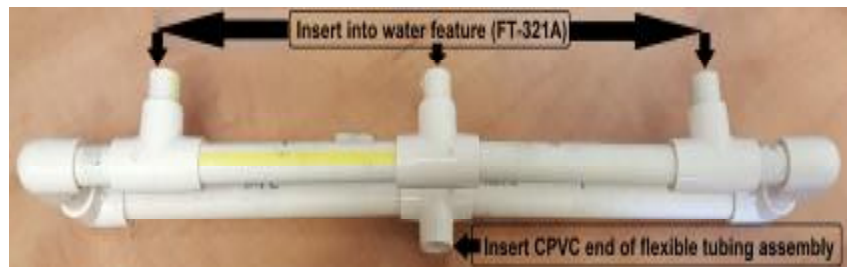

7. Center the water feature (FT-321A) into basin (FT-321B).
8. Fill the fountain with water.