

FT-129 Portico Wall Fountain



FOUNTAIN INFORMATION:

This fountain holds approximately 1 gallons of water.

This fountain uses a small fountain cover.
(FTNCOV-SM)

No refill device or submersible lights are suggested for
this fountain

Pump Kit Parts List

PK120-LV pump with transformer (1)
#7 stopper (1)
2" length of PermaGum Putty (1)
Approx. 6" length of 1/2" Black Non-Kink tubing (1) **
2" length of 5/8" clear tubing (1) **
Hose clamps (1)

* Hose clamps may be used as flow restrictors

** Tubing has been preassembled

TOOLS REQUIRED:

Bubble Level



PUMP INFORMATION:

PK120-LV - 120 GPH Low Voltage Pump
6 FT cord length

- W I N T E R C A R E -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise, components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drain pipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to ensure that plastic is secure and water is not accumulating in any fountain component.

- G E N E R A L F O U N T A I N T I P S -

Install fountains on a level surface. You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.

All of our cast stone is proudly



Made in USA

Check out YouTube for a "How to" video.

For more Campania product information visit www.campaniainternational.com

FT-129 Portico Wall Fountain


Make sure you are assembling your fountain on a wall and using a hanging method that will sufficiently hold a minimum of 100 pounds.

Hook Placement:

Position of back hooks:

There are 3 hooks positioned on the back. The two at the top are shaped like an upside down letter U, and are 5" from top and 3.75" from sides. The one at the bottom is placed like the letter U. This one is meant to keep the back of the fountain from sitting directly against the wall.

Please note these are best approximation as they are placed in mold by hand as consistently as possible.

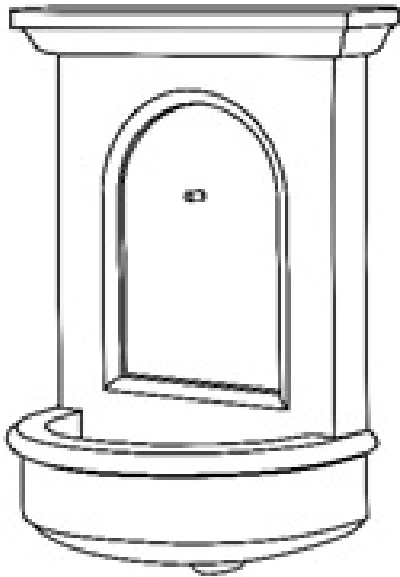

FT-129A (89 lbs)
16"L x 11"W x 26.5H

1. Assemble the pump kit
 - a. **NOTE: Be sure to use the appropriate size adapter provided with the pump**
 - b. Using a hose clamp, attach the 1/2" non-kink tubing to the pump outlet.
 - c. Place the stopper around the pump cord approximately 4" from the pump.
2. Place the PermaGum putty into the slit of the stopper.
3. Place the stopper and putty around the pump cord approximately 6 inches from the pump.
4. Be sure to stretch the putty to the end of the stopper's slit.
5. **FIRMLY** press the stopper into the hole evenly.
 - a. Note: Using the handle of a screwdriver or hammer works best to press the stopper in place.
6. Fit the clear end of the tubing assembly over the pipe protruding in the bottom of the basin.
7. Hang the fountain.
8. Attached the pump cord to the transformer.
9. Fill the basin with water.